C.B.S 1,2 & 3 AND MAGNETO SYSTEMS
SHARED SERVICE (MANUAL)
USING WALL HANDSET TELEPHONE No. 251 LB
FOR NEW WORK IN CBS 2 & 3 AREAS

WIRING

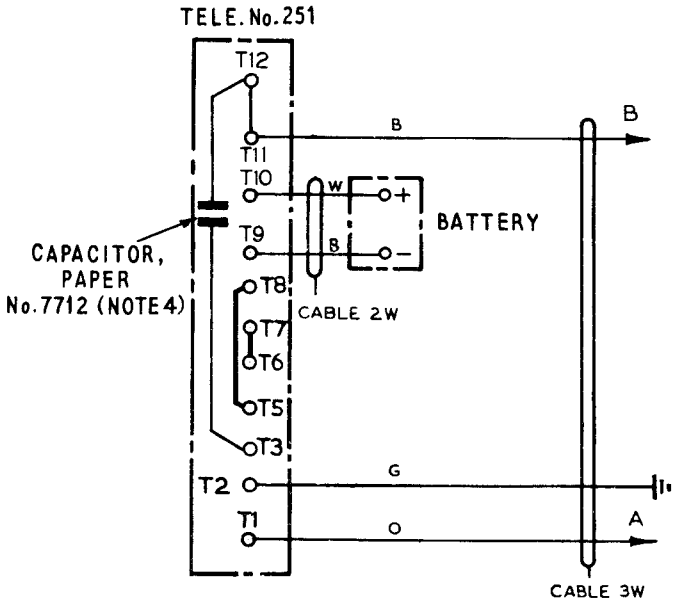

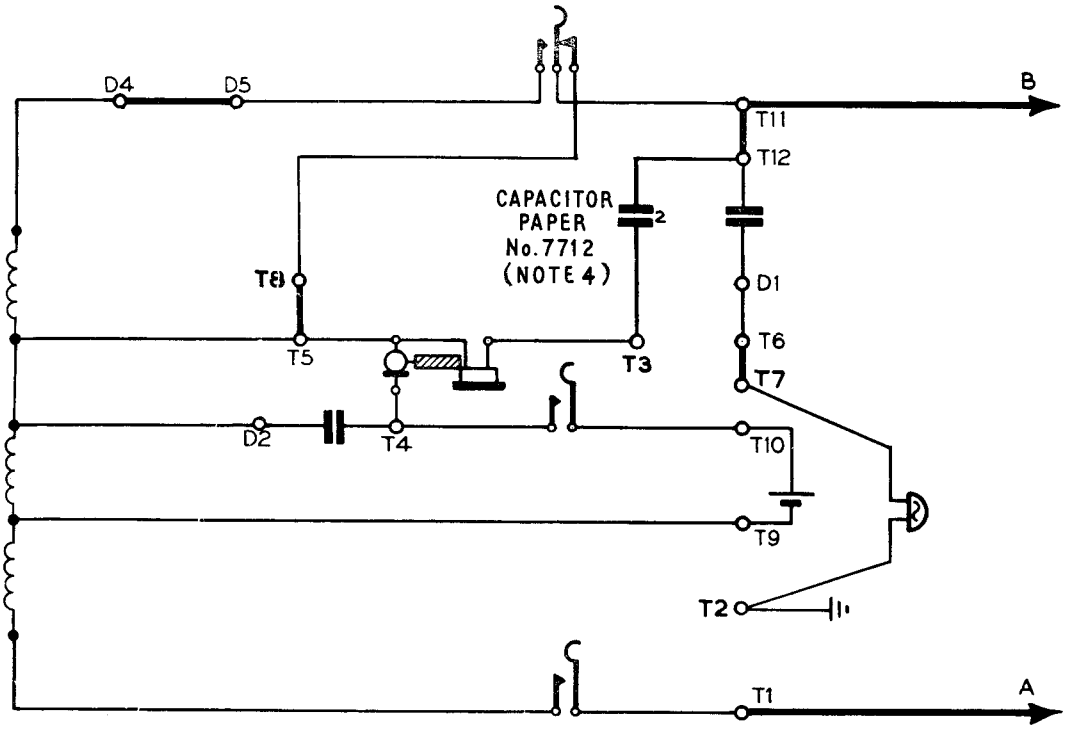

P.O.E.D. S BCH.	ISSUES			
PAPER: W		C	NEW FORMAT	3 . 8 . 67
CIRCULATION C.B.S. 1.2 & 3 & MAGNETO		B	CIRCUIT MODIFICATION. MADE 4 PANELS.	22 . 3 . 57
		A	CAPACITOR No. 7712 WAS MC No. 1021/1 S.G.I. K.M.A.	8 . 5 . 56
			B.C. H.C.W. A.E.W. E.S.R. S1	19 . 11 . 46

FOR NEW WORK IN MAGNETO AND CBS1 AREAS.

WIRING

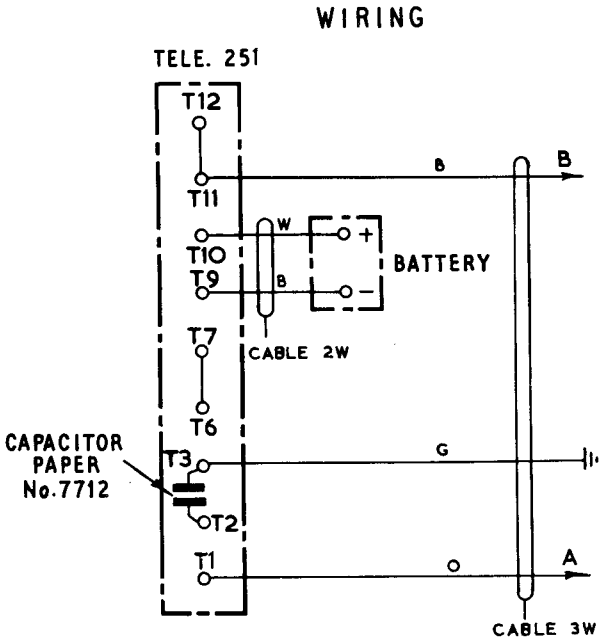

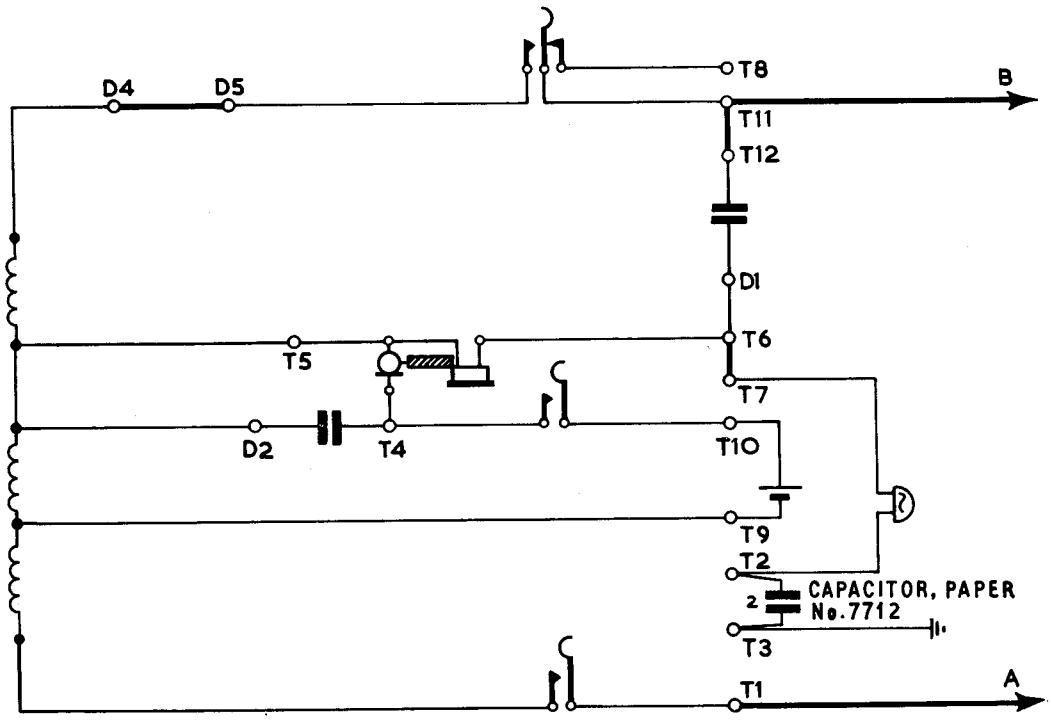

NOTES:-

1. Disconnect Strap T6 & T7 and connect Extn. Bell when required.

2. In C.B.S.1 & Magneto Areas use
   for X Stns - N.351 (CBS1 connexions)
   for Y Stns - This Dgm. Page 2.

3. In C.B.S.2 & 3 Areas use
   for X Stns.
   (a) This Dgm. Page 2 for Maintenance only.
   (b) This Dgm. Page 1 for New Work.
   for Y Stns.
   (a) This Dgm. Page 2 with A & B Lines reversed for Maintenance only.
   (b) This Dgm. Page 1 with A & B Lines reversed for New Work.

4. For new work Capacitor MC No.$102^{1}/1$ has been superseded by Capacitor Paper No.7712. This is fitted inside the Telephone Case using a clip No. 56 D. and a No.6 Rd.Hd. Wood Screw.

5. Where a Magneto Exchange is modified to Dgm. CBS 1124, at the X Station (Dgm.N351) connect T7 to T11 instead of to T8 on Telephone No.251.

6. Transfer green conductor from Terminal 6 to Terminal 3. Strap T5 to T8.